

SMOKE & CO COMBO ALARM

10-YEAR SEALED

BRK[®]

THE PROFESSIONAL STANDARD

CAT. **PRC710VB**

Sealed 3V Lithium Power Cell



Description:

LOW PROFILE DESIGN

Sleek, contemporary design blends into any décor.

10-YEAR LITHIUM POWER

10 years of continuous protection. No battery change required. Provides audible notice when alarm has reached its end of life.

TAMPERPROOF SEALED ALARM

Powercell cannot be removed.

VOICE WARNING WITH LOCATION

Exclusive! A voice will tell you the programmed location of the unit and danger detected.

ELECTROCHEMICAL CO SENSOR

Most accurate technology available for detecting carbon monoxide as compared to other sensing technologies.

PHOTOELECTRIC

Photoelectric technology is generally more sensitive at detecting large particles, which tend to be produced in greater amounts by smoldering fires.

SILENCE FEATURE

Silences nuisance alarms.

BRK PRC710VB (model PC1210V) is a 3V lithium power cell operated single station photoelectric smoke and carbon monoxide combination alarm specifically designed for residential and institutional applications including sleeping rooms of hospitals, hotels, motels, dormitories, and other multifamily dwellings as defined in standard NFPA 101. BRK PRC710VB has been fully tested and complies with, UL217, UL2034, CSFM, NFPA 72, NFPA 720, NFPA 101 and other agencies that model their codes after the above agencies. It meets building codes where tamperproof 10-year sealed lithium battery operated photoelectric smoke and carbon monoxide combination alarms with voice are required and with model building codes published by the ICC.


BRK PRC710VB is a state of the art smoke and CO combination alarm designed to provide early warning of a fire or carbon monoxide danger. It features a photoelectric smoke sensing chamber, an electrochemical CO sensor and "Voice Warning with Location". This exclusive feature incorporates a voice that will speak one of 11 pre-programmed locations and the danger detected. When the alarm sounds (if programmed for "basement", for example) it will speak "Warning, evacuate, smoke in basement". It features a sealed 10-year lithium power cell power supply that is permanently installed. The tamperproof design will not allow the powercell to be removed. The low power warning indicator will cause the alarm to "chirp" when it reaches the end of its service life and needs to be replaced. Upon end of life, the unit meets UL requirements for disabling the alarm and non-reinstallation of unit to mounting bracket. It also features a tamper resistant locking pin that locks the alarm to the mounting bracket to prevent removal of the alarm. Designed for wall or ceiling mounting. Includes mounting anchors and screws.



Exclusive!
Voice Warning!
WITH LOCATION[™]



CAT. PRC710VB

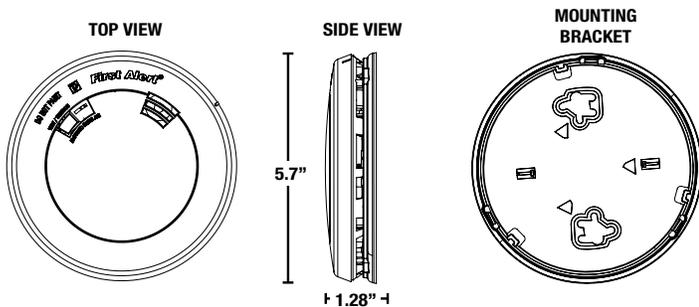




ARCHITECTURAL AND ENGINEERING SPEC

The smoke and CO combination alarm shall be a BRK Model PC1210V (cat. no. PRC710VB) and shall provide at a minimum the following features and functions:

1. A Photoelectric smoke sensing chamber and an electrochemical CO sensor.
2. A Voice Warning of danger detected (Smoke and/or Carbon Monoxide) in addition to speaking one of 11 pre-programmed locations, e.g. "Warning, Evacuate, Smoke in Basement"
3. The unit shall have an "10 Year End of Life" signal. This signal should be capable of temporarily being silenced for up to 2 days. After about 2 days, the signal will resume. After about 2-3 weeks the signal cannot be silenced.
4. Fully screened smoke sensing chamber to resist entry of small insects thereby reducing the probability of unwanted alarms and be capable of self restoring.
5. Powered by a sealed 10-year lithium powercell with a tamperproof design. The tamperproof design shall not allow the powercell to be removed. A low power warning indicator shall cause the alarm to "chirp" when it reaches the end of its service life and needs to be replaced. Upon end of life, the unit shall meet UL requirements for disabling the alarm and the non-reinstallation of unit to mounting bracket.
6. A visual LED power-on indicator to confirm unit is receiving power or is alarm.
7. A full function test button should check all alarm functions by simulating a smoke and CO condition, causing the unit to alarm.
8. Two Silence features - Low Battery Silence: Silence low battery chirp for up to 8 hours. Alarm Silence: Temporarily silence unwanted nuisance alarms.
9. Tamper resistant locking pin that locks alarm to mounting bracket to prevent removal of the alarm.
10. The unit shall be capable of operating between 40°F (4°C) and 100°F (38°C) and relative humidity between 10% and 95%.
11. The unit shall contain mounting hardware and shall be listed for wall or ceiling mounting.
12. The unit shall at a minimum meet the requirements of UL217, UL2034, CSFM, NFPA 72, NFPA 720, NFPA 101, ICC

INSTALLATION OF ALARM

Installation of this alarm must conform to NFPA 72 and 720. Always check your local building codes. Follow all instructions for placement as outlined in the user's manual in sections titled "Recommended Locations for Smoke Alarms" and "Locations to Avoid for Smoke Alarms".

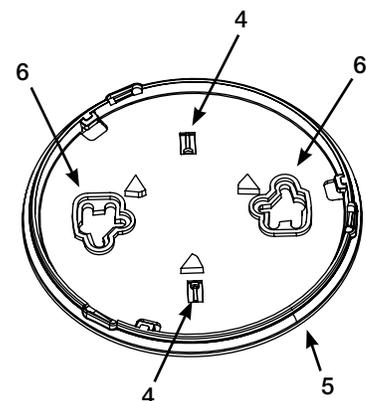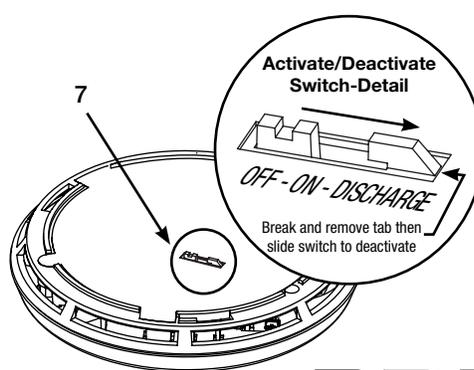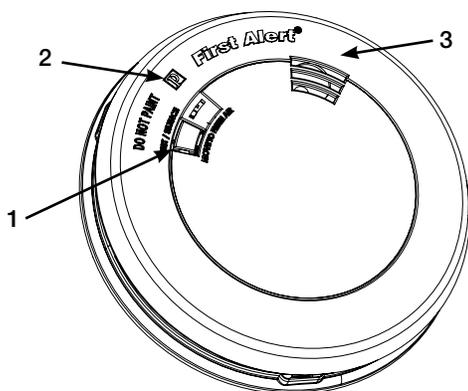

- | | |
|-------------------------------------|-------------------------------|
| 1. Test/Silence button | 5. Mounting bracket |
| 2. LED alarm light | 6. Mounting Slots |
| 3. Horn | 7. Activate/Deactivate switch |
| 4. Locking tab slot (Break out Tab) | |

TECHNICAL SPECS

Alarm Dimensions:	5.7" Dia. x 1.28"H
Weight:	7.6 oz
Operating Voltage:	3V Lithium Power Cell
Temperature Range:	40°F (4°C) to 100°F (38°C)
Humidity Range:	10% to 95% relative humidity (RH)
Audio Alarm:	85dB at 10 feet
Test/Silence:	Electronically simulates smoke and CO conditions, causing the unit to alarm. Press and hold test/silence button.
Alarm Reset:	Automatic when smoke clears
Smoke Sensor:	Photoelectric
CO Sensor:	Electrochemical
Indicator Lights/Sounds:	
DC Power:	Intermittent Green LED
Local Alarm:	Audio alarm and rapidly flashing Red LED
Listing:	Listed to UL217 and UL2034 Standards

SHIPPING SPECS

Individual Carton Dimensions	5.75 "L x 1.38"D x 5.75"H
Weight	0.50 lbs.
Cube	0.03 ft ³
UPC	0 29054 01501 3
Master Carton Dimensions	8.88 "L x 6.06"W x 6.31"H
Master Pack	6
Weight	3.4 lbs.
Cube:	0.20 ft ³
I2of5:	600 29054 01501 5
Pallet Information	
Cases per Layer	32
Number of Layers:	8
Cases per Pallet:	256
Units per Pallet:	1,536
Cube:	55.8 ft ³
Weight:	929 lbs.

THE PARTS OF THIS ALARM



©2014 BRK Brands, Inc. a Jarden Corporation
Company (NYSE: JAH)
3901 Liberty Street Road
Aurora, IL 60504-8122
All rights reserved

First Alert is a registered trademark of the First Alert Trust
BRK is a registered trademark of BRK Brands, Inc.
CM3210