

# FIRE EXTINGUISHER

CAT. **FE1A10G**



## 2.5 LB DRY POWDER

Monoammonium Phosphate  
extinguishing agent.

## SUREGRIP™ TRIGGER

Ergonomic trigger fits snugly into any hand  
and is designed for maximum control.

## EASY TO READ PRESSURE GAUGE

No confusion with clear markings of fire  
extinguisher charge status. Needle in  
"FULL" green area, product is ready to use,  
in red, it needs to be replaced.

## BRACKET INCLUDED

Plastic mounting bracket with strap for  
easy mounting.

## MARINE APPROVED

U.S. Coast Guard approved for marine  
use when used with supplied bracket.



U.S.C.G. Marine  
Approved

Listed to  
UL 299 &  
UL 711  
Standards

# First Alert®

## Single Use Multi-Purpose UL Rated: 1-A: 10-B:C

### Description:

First Alert Model FE1A10G is a 2.5 lb. dry powder fire extinguisher containing monoammonium phosphate fire extinguishing agent and complies with the Standard for Rating and Fire Testing of Fire Extinguishers, ANSI/UL711, CAN/ULC-S508. It also meets performance, listing and labeling standards for dry powder fire extinguishers as outlined in ANSI/UL299 and CAN/ULC-S504. It has a

UL Rating: 1-A: 10-B:C. Dry chemical and dry powder fire extinguishers are intended to be utilized in accordance with the Standard for Portable Fire Extinguishers, NFPA 10 and with the National Fire Code of Canada.


First Alert Cat. No. FE1A10G is a 2.5 lb. A-B-C fire extinguisher designed for multi-purpose household use to fight wood, paper, plastic, flammable liquids and electrical fires. The ergonomic Suregrip trigger fits snugly into any hand and is designed to provide maximum control. It comes with a plastic mounting bracket with strap for easy mounting and is U.S. Coast Guard approved for marine use when used with supplied bracket.




# CAT. FE1A10G



## OVERALL DIMENSIONS

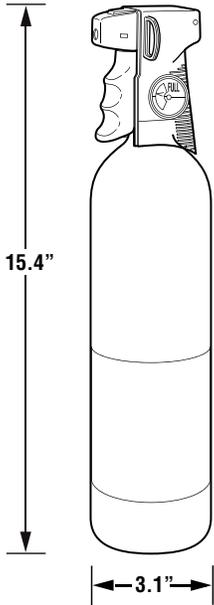

## BRACKET INSTALLATION

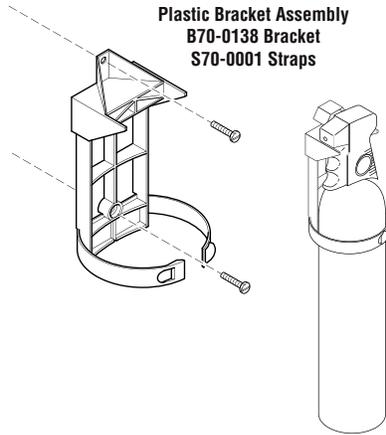

## TECHNICAL SPECS

Dimensions:	3.1" dia x 15.4"H
Weight:	4.2 lbs.
Temperature Range:	-40°F (-40°C) to 120°F (49°C)
Pressurized to:	120 psi (828kPa)
Head/Can Type:	Plastic/Steel
Rechargeable:	No
Rating/MSDS:	1-A: 10-B:C / F-9751 Foray® monoammonium phosphate
Listing:	Listed to UL711, ULC-S508, UL299 and ULC-S504 Standards

## SHIPPING SPECS:

Individual Carton Dimensions	3.61" L x 3.27" W x 15.71" H
Weight	4.4 lbs.
Cube	0.11 ft <sup>3</sup>
UPC	0 29054 00039 2
Master Carton Dimensions	10.38" L x 7.75" W x 16.38" H
Master Pack	6
Weight	27.2 lbs.
Cube	0.76 ft <sup>3</sup>
I2 of 5	600 29054 00039 4

## Pallet Information

Cases per Layer	22
Number of Layers	2
Cases per Pallet	44
Units per Pallet	264
Cube	40.0 ft <sup>3</sup>
Weight	1,279 lbs.

## ARCHITECTURAL AND ENGINEERING SPEC

The fire extinguisher shall be a First Alert Model FE1A10G and shall provide at a minimum the following features and functions:

1. Dry powder fire extinguisher containing monoammonium phosphate fire extinguishing agent.
2. Rated at 1-A: 10-B:C.
3. An ergonomic Suregrip trigger to provide maximum control and a red steel can.
4. An easy to read pressure gauge with no confusion clear markings of fire extinguisher charge status. Needle in "FULL" green area, product is ready to use, in red, it needs to be replaced.
5. A plastic mounting bracket with strap.
6. U.S. Coast Guard approved for marine use with approved bracket. Marine Type, Type-B:C-Size I. Approval 162.028/EX3622. Valid only with bracket number B70-0138 and strap number S70-0001.
7. The unit shall be capable of operating between -40°F (-40°C) and 120°F (49°C).
8. Pressurized to 120 psi (828 kPa). Meets DOT requirements for cylinders. Tested to 360 psi (2,483 kPa).
9. The unit shall at a minimum be listed to and meet the requirements of UL711, ULC-S508, UL299 and ULC-S504.

## FIRE EXTINGUISHER CLASSIFICATIONS

It's important to understand how fire extinguishers are classified in order to choose the correct model. BRK Brands, Inc. offers a wide range of residential, marine, commercial, and automotive fire extinguishers to meet the needs of your customers.

### This Fire Extinguisher



#### **A** TRASH-WOOD-PAPER

Fire extinguishers with a Class A rating are effective against fires involving paper, wood, textiles, and plastics. The primary chemical used to fight these fires is monoammonium phosphate, because of its ability to smother fires in these types of materials.



#### **B** LIQUIDS

Fire extinguishers with a Class B rating are effective against flammable liquid fires. These can be fires where cooking liquids, oil, gasoline, kerosene, or paint have become ignited. Two commonly used chemicals are effective in fighting these types of fires. Monoammonium phosphate effectively smothers the fire, while sodium bicarbonate induces a chemical reaction which extinguishes the fire.



#### **C** ELECTRICAL EQUIPMENT

Fire extinguishers with a Class C rating are suitable for fires in "live" electrical equipment. Both monoammonium phosphate and sodium bicarbonate are commonly used to fight this type of fire because of their nonconductive properties.

**BRK**<sup>®</sup>  
THE PROFESSIONAL STANDARD  
brkelectronics.com

©2009 BRK Brands, Inc. a Jarden Corporation  
Company (NYSE: JAH)  
3901 Liberty Street Road  
Aurora, IL 60504-8122  
All rights reserved.

First Alert is a registered trademark of the First Alert Trust  
BRK is a registered trademark of BRK Brands, Inc.  
Foray is a registered trademark of Anslu, Inc.  
CM2933