


FirstAlert USER'S MANUAL

120V PLUG-IN CARBON MONOXIDE ALARM WITH BATTERY BACK-UP AND TEST/SILENCE



120V AC ~ 60 Hz 0.09A

LISTED TO UL 2034 Model CO614

Reliable Protection, Maximum Convenience!

- Just install the battery, plug the alarm into a regular outlet, test, and it's ready to go!
- Battery back-up keeps alarm working if electricity fails.
- Memory stores highest levels of CO detected. Easy to display, easy to clear!

Printed in Mexico M08-0190-006 P 09/10

IMPORTANT! PLEASE READ CAREFULLY AND SAVE.

This user's manual contains important information about your Carbon Monoxide (CO) Alarm's operation. If you are installing this CO alarm for use by others, you must leave this manual—or a copy of it—with the end user.

© 2010 BRK Brands, Inc. All rights reserved. Distributed by BRK Brands, Inc. 101 Liberty Street Road, Aurora, IL 60504-8122 Consumer Affairs: (800) 323-9005 • www.firstalert.com

INTRODUCTION
BASIC SAFETY INFORMATION

- IMPORTANT!**
- Dangers, Warnings, and Cautions alert you to important operating instructions or to potentially hazardous situations. Pay special attention to these items.
 - THIS IS NOT A SMOKE ALARM!** This CO Alarm is designed to detect carbon monoxide from ANY source of combustion. It is NOT designed to detect smoke, fire, or any other gas.
 - This CO Alarm is approved for use in single-family residences. It is NOT designed for marine or RV use.

CAUTION!

This CO Alarm will only indicate the presence of carbon monoxide gas at the sensor. Carbon monoxide gas may be present in other areas.

- WARNING!**
- The Silence Feature is for your convenience only and will not correct a CO problem. Always check your home for a potential problem after an alarm. Failure to do so can result in injury or death.
 - This CO Alarm should receive continuous 120VAC, 60 Hz, pure sine wave electrical power. (The battery is meant for emergency back-up only). Do not use in an extension cord or outlet controlled by a dimmer or switch. In order for the emergency battery back-up to work, a working (fresh) battery must be properly installed.
 - NEVER ignore your Carbon Monoxide Alarm if it alarms. Refer to "If Your CO Alarm Sounds" for more information. Failure to do so can result in injury or death.
 - Test the CO Alarm once a week. If the CO Alarm ever fails to test correctly, have it replaced immediately! If the CO Alarm is not working properly, it cannot alert you to a problem.

This product is intended for use in ordinary indoor locations of family living units. It is not designed to measure CO levels in compliance with Occupational Safety and Health Administration (OSHA) commercial or industrial standards. Individuals with medical conditions that may make them more sensitive to carbon monoxide may consider using warning devices which provide audible and visual signals for carbon monoxide concentrations under 30 ppm. For additional information on carbon monoxide and your medical condition contact your physician.

HOW YOUR CO ALARM WORKS
GENERAL INFORMATION

CAUTION!


Leave your CO Alarm plugged in year-round. CO problems can occur any time during the year, and this Alarm can only alert you if it is plugged in and receiving power.

This CO Alarm is intended for use in a standard, unswitched 120V AC wall outlet. It is not intended for use in extension cords, power strips, or outlets controlled by a switch or dimmer. These may not provide continuous power to the unit. When fully powered, the unit samples the air and takes a new reading about every second. A microchip inside the unit stores each reading, and remembers the levels of CO it has been exposed to over time. The Alarm sounds when it has been exposed to a "critical" level of CO (measured in parts per million or "ppm") within a specified time (measured in minutes). This CO Alarm features a permanently installed sensor, an indicator light, and an 85 dB alarm horn. It also has a Silence Feature to temporarily quiet the alarm horn.


MALFUNCTION WARNING

This unit performs self-diagnostic tests approximately every second. If the Alarm malfunctions, replace it immediately.

THE COVER OF YOUR CO ALARM

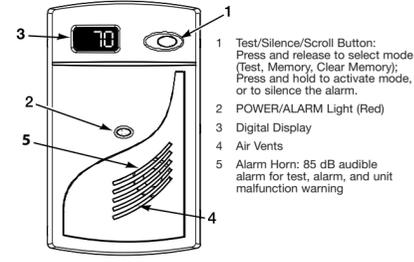

UNDERSTANDING YOUR CO ALARM
BASIC POWER CONDITIONS

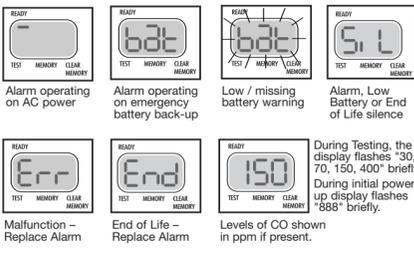

Alarm operating on AC power

Alarm operating on emergency battery back-up

Low / missing battery warning

Alarm, Low Battery or End of Life silence

Malfunction - Replace Alarm

End of Life - Replace Alarm

Levels of CO shown in ppm if present.

During Testing, the display flashes "30, 70, 150, 400" briefly. During initial power up display flashes "888" briefly.

UNDERSTANDING YOUR CO ALARM, Continued

What you see and hear during installation

WHEN YOU FIRST INSTALL THE BATTERY:	UNDER NORMAL CONDITIONS (AC POWER):
HORN: Silent	HORN: Silent
DISPLAY: Flashes "888" briefly; switches to "bat" after a minute	DISPLAY: Dash remains lit at "READY"
POWER/ALARM LIGHT: Flashes once a minute	POWER/ALARM LIGHT: Shines continuously

WHEN YOU FIRST PLUG-IN THE CO ALARM:	WHEN YOU TEST THE CO ALARM:
HORN: Silent	HORN: Sounds loudly - 4 beeps, pause, 4 beeps, pause
DISPLAY: Dash appears by "READY"	DISPLAY: Flashes "30, 70, 150, 400" briefly
POWER/ALARM LIGHT: Shines continuously	POWER/ALARM LIGHT: Flashes rapidly

What you see and hear under different conditions

DURING A POWER FAILURE (IN BATTERY BACK-UP):	IF THE CO ALARM IS NOT OPERATING PROPERLY:
HORN: Silent	HORN: Three chirps every minute
DISPLAY: Displays the word "bat" continuously	DISPLAY: Displays "Er"
POWER/ALARM LIGHT: Flashes once a minute.	POWER/ALARM LIGHT: Flashes three times in sync with the horn.

WHEN THE ELECTRICITY COMES BACK ON:	IF THE CO ALARM HAS REACHED ITS END OF LIFE:
HORN: Silent	HORN: Five chirps every minute
DISPLAY: Dash appears by "READY"	DISPLAY: Displays "End"
POWER/ALARM LIGHT: Shines continuously.	POWER/ALARM LIGHT: Flashes five times in sync with the horn.

IF BATTERY BECOMES LOW OR IS MISSING:

HORN: Chirps once a minute*

DISPLAY: The word "bat" flashes on and off.

POWER/ALARM LIGHT: Flashes once a minute

*Note: After 4 minutes, if CO levels drop below alarm levels, the unit will remain silent and return to normal operation. If CO presence still indicates a potentially dangerous situation, the horn will sound again.

What you see and hear if CO is detected

PRE-ALARM LEVELS:	IF YOU SILENCE THE ALARM:
HORN: Silent	HORN: Silent for about 4 minutes*
DISPLAY: Shows CO levels detected in ppm	DISPLAY: Shows CO levels detected in ppm
POWER/ALARM LIGHT: On continuously	POWER/ALARM LIGHT: Flashes rapidly

ALARM LEVELS OF CO ARE DETECTED:

HORN: Sounds loudly - 4 beeps, pause, 4 beeps, pause. This sequence repeats for as long as the unit is in alarm*

DISPLAY: Shows CO levels detected in ppm

POWER/ALARM LIGHT: Flashes rapidly

*Note: If unit goes into alarm under battery back-up power, the regular 4 beeps-brief pause cycle will repeat for four minutes. After four minutes, the pause will increase to 1 minute.

USING THE PEAK CO MEMORY

The CO Memory Feature lets you check the highest level of CO recorded during an alarm.

To check CO Memory:

1. Press and release the Test/Silence/Scroll button until the dash scrolls to "MEMORY".
2. Press and hold Test/Silence/Scroll button to display Memory CO level.

To clear CO Memory:


1. Automatically resets after 24 hours.
2. Press and release the Test/Silence/Scroll button until the dash scrolls to "CLEAR MEMORY".
3. Press and hold the Test/Silence/Scroll button until the display shows "CLR"
3. Remove all power; unplug the Alarm and remove the battery.

NOTE: The highest CO level will be saved for 24 hours. DO NOT clear the CO Memory reading if you plan to call someone to investigate a CO problem! Clear the CO Memory reading only after the investigator has checked your home. If the investigator will not arrive within the 24 hour time period before the unit automatically resets, be sure to write down the peak level.

INSTALLATION
WHERE TO INSTALL CO ALARMS

The National Fire Protection Association (NFPA) recommends that a CO Alarm should be centrally located outside of each separate sleeping area in the immediate vicinity of the bedrooms. For added protection, install additional CO Alarms in each separate bedroom, and on every level of your home.

If your bedroom hallway is longer than 40 feet (12 meters), install a CO Alarm at BOTH ends of the hallway.

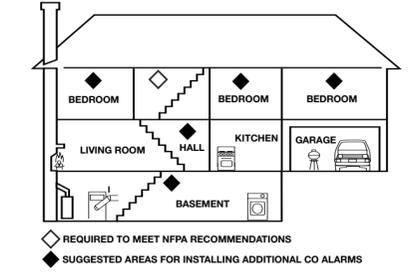

In a Single-level Home:

- Install at least one CO Alarm near or within each separate sleeping area.
- For added protection, install an additional CO Alarm at least 20 feet (6 meters) away from the furnace or fuel burning heat source.

In a Multi-level Home:

- Install at least one CO Alarm near or within each separate sleeping area.
- For added protection, install at least one CO Alarm on each level of the home. If you have a basement, install that CO Alarm at the top of the basement stairs.
- For added protection, install an additional CO Alarm at least 20 feet (6 meters) away from the furnace or fuel burning heat source.

WARNING!

This unit should receive continuous electrical power. (The battery is meant for emergency back-up only). Choose an outlet where it can be accidentally unplugged or switched off by children. Keep small children away from the unit. Teach them not to play with it or unplug it. Explain what the alarms mean.

WHERE CO ALARMS SHOULD NOT BE INSTALLED

- DO NOT** locate this CO Alarm:
- In garages, kitchens, furnace rooms, or in any extremely dusty, dirty or greasy areas.
 - Closer than 15 feet (4.6 meters) from a furnace or other fuel burning heat source, or fuel burning appliances like a water heater.
 - Within 5 feet (1.5 meters) of any cooking appliance.
 - In extremely humid areas. This Alarm should be at least 10 feet (3 meters) from a bath or shower, sauna, humidifier, vaporizer, dishwasher, laundry room, utility room or other source of high humidity.
 - In areas where temperature is colder than 40° F (4° C) or hotter than 100° F (38° C). These areas include non-air-conditioned crawl spaces, unfinished attics, uninsulated or poorly insulated ceilings, porches, and garages.
 - In turbulent air, like near ceiling fans, heat vents, air conditioners, fresh air returns, or open windows. Blowing air may prevent CO from reaching the sensors.
 - In direct sunlight.
 - In outlets covered by curtains or other obstruction.

WARNING!

THIS CO Alarm is designed for use inside a single-family home or apartment. It is not meant to be used in common lobbies, hallways, or basements of multi-family buildings unless working CO Alarms are also installed in each family living unit. CO Alarms in common areas may not be heard in inside individual family living units.


This CO Alarm alone is not a suitable substitute for complete detection systems in places which house many people, like hotels or dormitories, unless a CO Alarm is also placed in each unit.

DO NOT use this CO Alarm in warehouses, industrial or commercial buildings, special-purpose non-residential buildings, RVs, boats, or airplanes. This CO Alarm is specifically designed for residential use, and may not provide adequate protection in non-residential applications.

HOW TO INSTALL YOUR CO ALARM
IMPORTANT! Read all instructions before using this product.

Quick reference:

- Install the 9V battery to activate the battery back-up.
- Plug the Alarm into a standard 120V unswitched outlet.
- Test the CO Alarm.



TO ACTIVATE OR CHANGE BATTERY BACK-UP

1. Open the battery compartment on the back of the Alarm.
2. Insert the new battery, making sure it snaps completely into the battery terminals and cannot be shaken loose.
3. Close the battery compartment, then test the battery back-up by pressing the Test/Silence/Scroll button.
4. Plug the CO Alarm into the outlet.

IMPORTANT!

The battery back-up is designed to provide emergency power to the CO Alarm for 7 days. Actual back-up time depends on the strength (freshness) of the battery. The battery back-up will not work unless a good battery is properly installed.

PLUG THE ALARM INTO AN OUTLET

WARNING!

This CO Alarm should receive continuous electrical power. The battery is meant for emergency back-up only. Do not plug this Alarm into an outlet controlled by a dimmer or switch.

1. Plug the unit into a standard UNSWITCHED 120V AC outlet. The unit should be located where it can wake you if it alarms at night.
2. Make sure the POWER/ALARM light shines continuously when you plug it in.
3. Test by pressing the Test/Silence/Scroll button firmly until the unit sounds: 4 beeps, pause, 4 beeps. During testing, the POWER/ALARM light will flash and "30, 70, 150, 400" will scroll on the Display. This is normal.

PREPARE YOUR ALARM LABELS

Find the pair of self-adhesive labels included with this CO Alarm.

- On each label write in the phone number of your emergency responder (like 911) and a qualified appliance technician.
- Place one label near the CO Alarm, and the other label in the "fresh air" location you plan to go if the alarm sounds.

NOTE: A qualified appliance technician is defined as "a person, firm, corporation, or company that either in person or through a representative, is engaged in and responsible for the installation, testing, servicing, or replacement of heating, ventilation, air conditioning (HVAC) equipment, combustion appliances and equipment, and/or gas fireplaces or other decorative combustion equipment."

IF YOUR CO ALARM SOUNDS

WARNING!

Activation of your CO Alarm indicates the presence of carbon monoxide (CO) which can kill you. When your CO Alarm sounds, you must not ignore it!

IF THE ALARM SIGNAL SOUNDS:

1. Operate the Test/Silence button.
2. Call your emergency services, fire department or 911. Write down the number of your local emergency services here:

3. Immediately move to fresh air—outdoors or by an open door or window. Do a head count to check that all persons are accounted for. Do not re-enter the premises, or move away from the open door or window until the emergency services responder has arrived, the premises have been aired out, and your CO Alarm remains in its normal condition.
4. After following steps 1-3, if your CO Alarm reactivates within a 24-hour period, repeat steps 1-3 and call a qualified appliance technician to investigate for sources of CO from fuel-burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection have the equipment serviced immediately. Note any combustion equipment not inspected by the technician, and consult the manufacturers' instructions, or contact the manufacturers directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, and have not, been operating in an attached garage or adjacent to the residence. Write down the number of a qualified appliance technician here:

"ALARM-MOVE TO FRESH AIR"

If you hear the alarm horn and the red light is flashing, move everyone to a source of fresh air.

DO NOT unplug the CO Alarm!



WARNING!

Alarms have various limitations. See "General Limitations of CO Alarms" for details.

Continued...

USING THE SILENCE FEATURES

The Silence Feature is intended to temporarily silence your CO Alarm's horn while you correct the problem—it will not correct a CO problem. While the alarm is silenced, it will continue to monitor the air for CO.

To Activate the Silence Feature: press and hold the Test/Silence/Scroll button until the horn is silent.

Once you activate the Silence Feature: the Silence cycle will last approximately 4 minutes.

- If CO levels drop below alarm levels after 4 minutes, the unit will return to normal operation and remain silent.
- If CO levels do not drop below alarm levels, the unit will alarm again.

WARNING!

The Silence Feature is for your convenience only and will not correct a CO problem. Always check your home for a potential problem after any alarm. Failure to do so can result in injury or death.

WARNING!

NEVER disconnect your CO Alarm to silence the horn. Use the Silence Feature. Unplugging the CO Alarm and removing the batteries removes your protection!

SILENCING THE LOW BATTERY WARNING

This silence feature can temporarily quiet the low battery warning "chirp" for up to 8 hours without having to remove the battery. You can silence the low battery warning "chirp" by pressing the Test/Silence button on the alarm cover.

Once the low battery warning "chirp" silence feature is activated, the unit continues to flash the red light once a minute for 8 hours; the word "bat" will flash on and off on the display. After 8 hours, the low battery "chirp" will resume. Replace the battery as soon as possible, this unit will not operate without battery power!

To deactivate this feature: Press the Test/Silence button again. The unit will go into Test Mode and the low battery warning will resume (LED flashes and unit sounds "chirp" once a minute).

If you cannot silence the low battery warning, replace your battery immediately.

SILENCING THE END OF LIFE SIGNAL

This silence feature can temporarily quiet the End of Life warning "chirp" for up to 2 days. You can silence the End of Life warning "chirp" by pressing the Test/Silence button. The horn will chirp, acknowledging that the End of Life silence feature has been activated.

After approximately 2 days, the End of Life "chirp" will resume.

After approximately 2-3 weeks the End of Life warning cannot be silenced.

TESTING AND MAINTENANCE

WEEKLY TESTING

You can test this CO Alarm by pressing the Test/Silence/Scroll button on the Alarm cover until alarm sounds.

During testing, you will hear a loud alarm sequence – 4 beeps, pause, 4 beeps, pause.

WARNING!

- If the Alarm ever fails to test properly, replace it immediately. Products under warranty may be returned to the manufacturer for replacement. See "Limited Warranty" at the end of this manual.
- DO NOT stand close to the Alarm when the horn is sounding. Exposure at close range may be harmful to your hearing. When testing, step away when horn starts sounding.
- NEVER use vehicle exhaust! Exhaust may cause permanent damage and voids your warranty.

REGULAR MAINTENANCE
To keep the CO Alarm working properly:

- Test it every week as described in "Weekly Testing."
- Vacuum the CO Alarm cover at least once a month, using the soft brush attachment. Never use water, cleaners, or solvents, since they may damage the unit. Test the Alarm again after vacuuming.
- Replace the battery immediately when you see/hear the "Low Battery Warning".

The Low (or Missing) Battery Warning:

The horn will "chirp" once a minute and the word "bat" will flash on and off on the display.



REPLACING THE BATTERY
Choosing a Replacement Battery:

This unit requires one standard 9V alkaline battery. The following alkaline batteries are acceptable as replacements: Duracell #MN1604 or MX1604 Eveready "Energy" #52. You can also use an Ultralite 9 volt lithium battery U9VL for longer service life between battery changes. These replacement batteries are commonly available at local retail stores.

IMPORTANT!

Use only the alkaline or lithium replacement batteries listed. The unit may not operate properly with other batteries. Never use rechargeable batteries since they may not provide a constant charge.

CAUTION!

DO NOT spray cleaning chemicals or insect sprays directly on or near the CO Alarm. DO NOT paint over the CO Alarm. Doing so may cause permanent damage.

IMPORTANT!

Household cleaners, aerosol chemicals and other contaminants can affect the sensor. When using any of these materials near the CO Alarm, make sure the room is well ventilated.

IMPORTANT!

If your home is being fumigated, unplug the unit temporarily and put it where it will not be exposed to chemicals or fumes. When fumigation is complete and all traces of fumes clear, plug the unit back in and reset it.

WHAT YOU NEED TO KNOW ABOUT CO WHAT IS CO?

CO is an invisible, odorless, tasteless gas produced when fossil fuels do not burn completely, or are exposed to heat (usually fire). Electrical appliances typically do not produce CO.

These fuels include: Wood, coal, charcoal, oil, natural gas, gasoline, kerosene, and propane.

Common appliances are often sources of CO. If they are not properly maintained, are improperly ventilated, or malfunction, CO levels can rise quickly. CO is a real danger now that homes are more energy efficient. "Air-tight" homes with added insulation, sealed windows, and other weatherproofing can "trap" CO inside.

SYMPTOMS OF CO POISONING

These symptoms are related to CO POISONING and should be discussed with ALL household members.

Mild Exposure: Throbbing headache, drowsiness, confusion, fast heart rate.

Extreme Exposure: Convulsions, unconsciousness, heart and lung failure. Exposure to carbon monoxide can cause brain damage, death.

IMPORTANT!

This CO Alarm measures exposure to CO over time. It alarms if CO levels are extremely high in a short period of time, or if CO levels reach a certain minimum over a long period of time. The CO Alarm generally sounds an alarm before the onset of symptoms in average, healthy adults. Why is this important? Because you need to be warned of a potential CO problem while you can still react in time. In many reported cases of CO exposure, victims may be aware that they are not feeling well, but become disoriented and can no longer react well enough to exit the building or get help. Also, young children and pets may be the first affected. The average healthy adult might not feel any symptoms when the CO Alarm sounds. However, people with cardiac or respiratory problems, infants, unborn babies, pregnant mothers, or elderly people can be more quickly and severely affected by CO. If you experience even mild symptoms of CO poisoning, consult your doctor immediately!


FINDING THE SOURCE OF CO AFTER AN ALARM

Carbon monoxide is an odorless, invisible gas, which often makes it difficult to locate the source of CO after an alarm. These are a few of the factors that can make it difficult to locate sources of CO:

- House well ventilated before the investigator arrives.
- Problem caused by "backdrafting."
- Transient CO problem caused by special circumstances.

Because CO may dissipate by the time an investigator arrives, it may be difficult to locate the source of CO. **BRK Brands, Inc. shall not be obligated to pay for any carbon monoxide investigation or service call.**

POTENTIAL SOURCES OF CO IN THE HOME

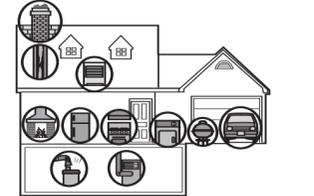

Fuel-burning appliances like: portable heater, gas or wood burning fireplace, gas kitchen range or cooktop, gas clothes dryer.

Damaged or insufficient venting: corroded or disconnected water heater vent pipe, leaking chimney pipe or flue, or cracked heat exchanger, blocked or clogged chimney opening.

Improper use of appliance/device: operating a barbecue grill or vehicle in an enclosed area (like a garage or screened porch).

Transient CO Problems: "transient" or on-again/off-again CO problems can be caused by outdoor conditions and other special circumstances.

The following conditions can result in transient CO situations:

1. Excessive spillage or reverse venting of fuel appliances caused by outdoor conditions such as:
 - Wind direction and/or velocity, including high, gusty winds. Heavy air in the vent pipes (cold/humid air with extended periods between cycles).
 - Negative pressure differential resulting from the use of exhaust fans.
 - Several appliances running at the same time competing for limited fresh air.
 - Vent pipe connections vibrating loose from clothes dryers, furnaces, or water heaters.
 - Obstructions in or unconventional vent pipe designs which can amplify the above situations.
2. Extended operation of unvented fuel burning devices (range, oven, fireplace).
3. Temperature inversions, which can trap exhaust close to the ground.
4. Car idling in an open or closed attached garage, or near a home.

These conditions are dangerous because they can trap exhaust in your home. Since these conditions can come and go, they are also hard to recreate during a CO investigation.

HOW CAN I PROTECT MY FAMILY?

A CO Alarm is an excellent means of protection. It monitors the air for carbon monoxide and sounds a loud alarm before Carbon Monoxide levels become threatening or deadly, healthy adults.

A CO Alarm is not a substitute for proper maintenance of home appliances.

To help prevent CO problems and reduce the risk of CO poisoning:

- Clean chimneys and flues yearly. Keep them free of debris, leaves, and nests for proper air flow. Also, have a professional check for rust and corrosion, cracks, or separations. These conditions can prevent proper air movement and cause backdrafting. Never "cap" or cover a chimney in any way that would block air flow.
- Test and maintain all fuel-burning equipment annually. Many local gas or oil companies and HVAC companies offer appliance inspections for a nominal fee.
- Make regular visual inspections of all fuel-burning appliances. Check appliances for excessive rust and scaling. Also check the flame on the burner and pilot lights. The flame should be blue. A yellow flame means fuel is not being burned completely and CO may be present. Keep the blower door on the furnace closed. Use vents or fans when they are available on all fuel-burning appliances. Make sure appliances are vented to the outside. Do not grill or barbecue indoors, or in garages or on screen porches.

CO Alarms are not a substitute for fire insurance. Though these CO Alarms warn against increasing CO levels, BRK Brands, Inc. does not warrant or imply in any way that they will protect lives from CO poisoning. Homeowners and renters must insure their lives.

CO Alarms have a limited life. Although the CO Alarm and all of its parts have passed many stringent tests and are designed to be as reliable as possible, any of these parts could fail at any time. Therefore, you must test your CO Alarm weekly.

CO Alarms are not foolproof. Like all other electronic devices, CO Alarms have limitations. They can only detect CO that reaches their sensors. They may not give early warning to rising CO levels if the CO is coming from a remote part of the home, away from the CO Alarm.

LIMITED WARRANTY

BRK Brands, Inc. ("BRK") the maker of First Alert® brand products, warrants that for a period of seven years from the date of purchase, this product will be free from defects in material and workmanship. BRK, at its option, will repair or replace this product or any component of the product found to be defective during the warranty period. Replacement will be made with a new or remanufactured product or component. If the product is no longer available, replacement may be made with a similar product of equal or greater value. This is your exclusive warranty.

This warranty is valid for the original retail purchaser from the date of initial retail purchase and is not transferable. Keep the original sales receipt. Proof of purchase is required to obtain warranty performance. BRK dealers, service centers, or retail stores selling BRK products do not have the right to alter, modify or any way change the terms and conditions of this warranty.

This warranty does not cover normal wear of parts or damage resulting from any of the following: negligent use or misuse of the product, use on improper voltage or current, use contrary to the operating instructions, disassembly, repair or alteration by anyone other than BRK or an authorized service center. Further, the warranty does not cover acts of God, such as fire, flood, hurricanes and tornadoes or any batteries that are included with this unit.

BRK shall not be liable for any incidental or consequential damages caused by the breach of any express or implied warranty. Except to the extent prohibited by applicable law, any implied warranty of merchantability or fitness for a particular purpose is limited in duration to the duration of the above warranty. Some states, provinces, or jurisdictions do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above limitations or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that